


Gamme 1 SAT sur 1 fibre

1 SAT RANGE


Installation Pavillonnaire

HORIZONTAL DISTRIBUTION

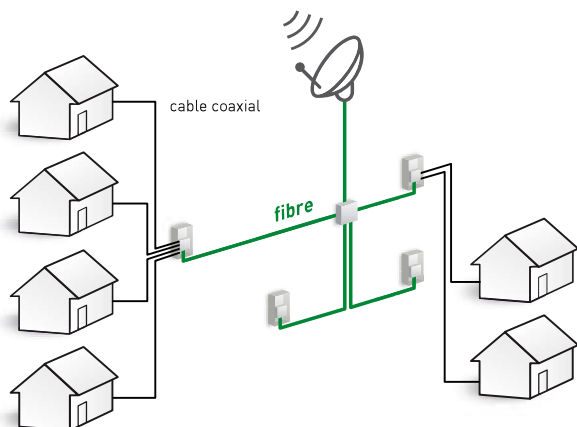

Installation Collective

VERTICAL DISTRIBUTION

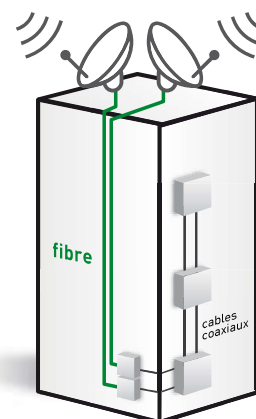

LNB OPTIQUE

Ref 0144600

LNB OPTIQUE C120

Ref 0144699R13

NOUVEAU



VIRTUAL QUAD
1SAT + TER (SANS ALIM)

Ref 0144918R13



VIRTUAL QUATTRO
1SAT + TER (SANS ALIM)

Ref 0144919R13

Alimentation via les récepteurs satellites ou 20 VDC non fournie
Power supply by satellite receivers or 20 VDC not supplied

LNB OPTIQUE / OPTICAL LNB

Fréquence d'entrée / Input Frequency	10,7-12,75 GHz
Fréquence de sortie / Output Frequency	950 MHz - 5,45 GHz
Sortie optique / Optical Output	FC/PC
Niveau nominal sortie optique Optical Output Power	7dBm (1310nm) (à 25°C)
Isolation polarité inversée / Cross polar	30 dB / min. 25 dB
Facteur de bruit / Noise Figure	0.7 dB
Gain de conversion / Conversion gain (25°C)	63 dB
Température de fonctionnement / Temperature	-30°C à +60°C
Connecteur alimentation Power supply connector	F Type
Alimentation / Power Supply	12 VDC fournie
Consommation / Current Consumption	< 160 mA

VIRTUAL SAT+TER

	QUAD	QUATTRO
Puissance optique d'entrée Optical Power Input Parameters	0 à -15 dBm	
Fréquence de sortie / Output Frequency (MHz)	950-2150	88-2150
Niveau nominal sortie SAT SAT output level (x 30 transponders)	75 dBµV	79 dBµV
Niveau nominal sortie TER / TER output level	-	78 dBµV
Alimentation - Consommation Power Supply - Consumption	10-20V - 220mA non fournie	
Dimensions / Size (mm)	128x116x27	121x80x26
Poids / Weight	325g	175g